


MECHANICAL DOCKLEVELERS

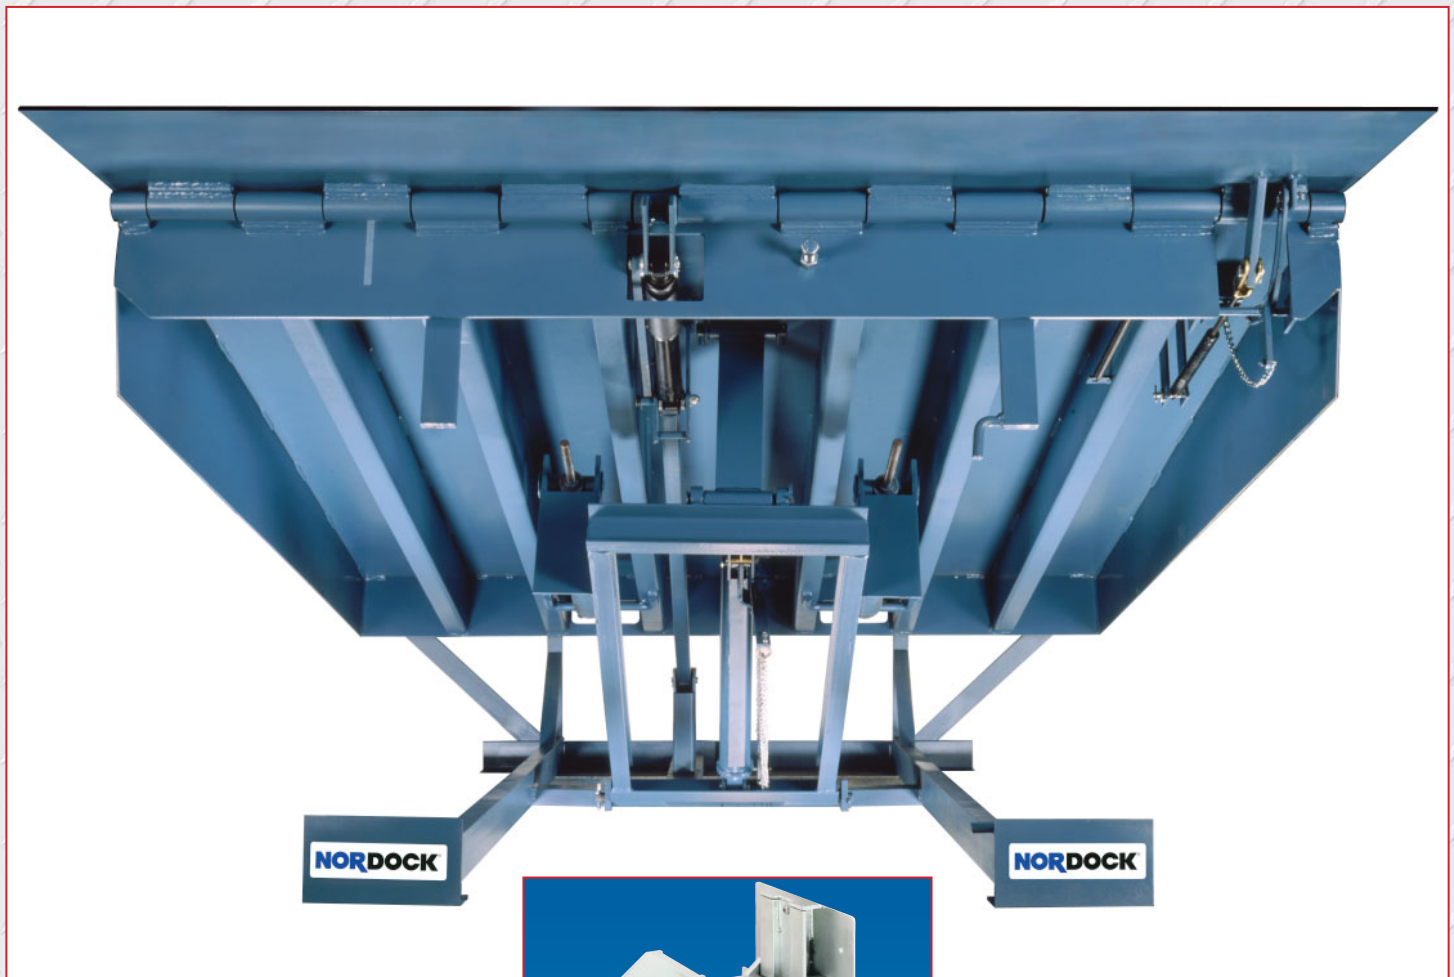

Available TRUCK-LOCK®
Safety Systems

FEATURE SUMMARY

- Smooth & Easy Walkout Lip Extension
- Center Position Holdown Eliminates Deck Twist for Level Storage
- 33% Deck to Beam Weld Pattern Provides Superior Strength
- Five Rear Structural Frame Supports
- Retracting Solid Steel Deck Legs
- Black & Yellow Stripes on Side Skirts
- Full Width Rear Hinge Rod
- Working Range Welded Side Guards
- Easy Retracting Yieldable Lip
- Open Frame Design for Easy Pit Cleaning
- Dual Pawl Holdown System Reduces Upward Deck Movement During Storage
- Below Dock End Loading Control
- Integral Maintenance Support
- Security Night Lock
- Lip Assist Spring Reduces Stress on Lip Extension System
- Two Dock Bumpers Included
- Easy Transfer Fixed Rear Hinge With No Pinch Point

Dedicated People ~ Superior Products

SPECIFICATIONS

MECHANICAL DOCKLEVELERS

DESCRIPTION

The HEAVY-METAL™ Series of mechanical docklevelers have set a new benchmark for strength, ease of use and dependability.

Equipped with more standard performance features than any other comparable product while providing the utmost in affordability.

Designed with the industry's most reliable holdown and a full yielding walkout lip extension for the smoothest and easiest operating mechanical dockleveler.

Available in capacity ratings from 25 – 40,000 lbs. in increments of 5,000 lbs. and standard nominal sizes of 6, 6.5 & 7 feet wide x 6 & 8 feet long.

Standard features include working range side guards, retracting solid steel deck legs, night security lock, end-loading control and integral maintenance support.

OPERATION

The operator releases the holdown at the rear of the platform until the deck is raised and stopped. The operator walks the platform down extending the lip onto the truck bed. The deck will float up and down and cant side to side with the truck during loading. The standard 16" long lip will extend out and engage a truck bed 12" above and below floor level.

CONSTRUCTION

The platform is a unitized welded structure with 33% deck to beam weld pattern, and continuous welds at the beam, header plate and hinge tubes for maximum strength.

The deck plate, lip plate, beam sections and lugs are constructed of minimum 50-55,000 PSI yield material. The fixed rear hinge provides 4" of side-to-side tilt with no pinch point. The frame has five solid steel rear upright supports, five hinge connections and a full width rear hinge rod.

The open design frame provides for simple pit cleaning and the security lock system prevents illegal entry when the door is closed.

The front and rear hinge rods are constructed of SAE 1045 material and are factory coated with anti-seize lubricant.



WARRANTY

Nordock guarantees that the HEAVY-METAL™ Series of Mechanical Docklevelers will perform as described and to the full satisfaction of the purchaser for one-year from date of receipt.

In addition, structural components are guaranteed for ten-years under specified guidelines.

OPTIONAL EQUIPMENT

- 18" or 20" Long Lip
- Zinc Plated Hinge Rods
- Grease Fittings on Front Hinge
- Full Range Telescoping Side Guards
- Center Deck Reinforcement*

*Required when three wheel forklifts are used.

ACCESSORIES

- WEARTOUGH® Dock Seals & Shelters
- TRUCK-LOCK® Truck Restraint Systems
- FALL-STOP™ Safety Barrier Gates
- Brush Weather Seals
- Self Forming Pour in Pans
- Steel Spring & Steel Faced Dock Bumpers
- Dock Lights

MODELS AND NOMINAL DIMENSIONS

Model*	Width	Length
HM-66	6'0"	6'0"
HM-68	6'0"	8'0"
HM-6.56	6'6"	6'0"
HM-6.58	6'6"	8'0"
HM-76	7'0"	6'0"
HM-78	7'0"	8'0"

*Add capacity required from 25,000 to 40,000 lbs. Example: HM-68-35.

NORDOCK® INC.

Website: www.nordockinc.com ~ Email: Sales@nordockinc.com ~ Toll Free: 866-885-4276

Nordock Inc. reserves the right to make changes to specifications without notice or obligation. Nordock products are covered by various U.S. and foreign patents or pending applications.